

Projecting Saudi Sectoral Electricity Demand in 2030 Using a Computable General Equilibrium Model

Salaheddine Soummame, Frédéric Gherzi

June 2021

Doi: 10.30573/KS--2021-DP12

About KAPSARC

The King Abdullah Petroleum Studies and Research Center (KAPSARC) is a non-profit global institution dedicated to independent research into energy economics, policy, technology and the environment across all types of energy. KAPSARC's mandate is to advance the understanding of energy challenges and opportunities facing the world today and tomorrow, through unbiased, independent, and high-caliber research for the benefit of society. KAPSARC is located in Riyadh, Saudi Arabia.

This publication is also available in Arabic.

Legal Notice

© Copyright 2021 King Abdullah Petroleum Studies and Research Center ("KAPSARC").

This Document (and any information, data or materials contained therein) (the "Document") shall not be used without the proper attribution to KAPSARC. The Document shall not be reproduced, in whole or in part, without the written permission of KAPSARC. KAPSARC makes no warranty, representation or undertaking whether expressed or implied, nor does it assume any legal liability, whether direct or indirect, or responsibility for the accuracy, completeness, or usefulness of any information that is contained in the Document. Nothing in the Document constitutes or shall be implied to constitute advice, recommendation or option. The views and opinions expressed in this publication are those of the authors and do not necessarily reflect the official views or position of KAPSARC.

Key Points

Electricity demand in Saudi Arabia is undergoing unprecedented changes following the implementation of efficiency measures and energy price reforms. For the first time in decades, the country's electricity demand is stagnating, suggesting that consumer behavior has structurally shifted. These changes raise uncertainties about the potential trajectory of long-term electricity demand. Thus, this study uses a computable general equilibrium model to project sectoral electricity demand in Saudi Arabia through 2030. We project that growth in total Saudi electricity demand will significantly decelerate over the coming decade compared with historical trends. In our reference scenario, this demand reaches 365.4 terawatt-hours (TWh) by 2030. However, our sectoral decomposition shows large disparities across sectors. Demand is projected to grow more rapidly in the industrial and services segments than in the residential sector. Nevertheless, the latter will still account for the largest share of total consumption in 2030. We also simulate four additional scenarios for domestic electricity price reforms and efficiency policies. Successfully implementing these measures may result in significant energy savings. Aligning Saudi electricity prices with the average electricity price among G20 countries can reduce total electricity demand by up to 71.6 TWh in 2030. Independently enforcing efficiency policies can reduce total electricity demand by up to 118.7 TWh. Moreover, alternative policy scenarios suggest that the macroeconomic gains from energy savings can alleviate some of the Saudi energy system's burden on public finance.

- We use a computable general equilibrium model to project Saudi electricity demand through 2030.
- Saudi electricity demand is expected to grow more slowly over the coming decade relative to its historical trend.
- The timing and size of recently announced large-scale projects may increase our demand projections, and these effects may be analyzed in future research.
- We simulate various hypothetical scenarios for price reforms and efficiency gains in electricity intensity uses.
- Price reforms and efficiency measures may reduce total demand by 11% to 32% in 2030, with higher savings realized under energy efficiency measures.
- The macroeconomic gains from energy efficiency scenarios are greater than those from price reform scenarios.

1. Introduction

Projecting future demand for electricity is central to power sector planning, as these projections inform capacity investment requirements and related infrastructure expansions. Electricity is not currently economically storable in large volumes. Thus, the underlying drivers of electricity demand and potential market shifts must be carefully considered to minimize power system costs.¹

In the Kingdom of Saudi Arabia, demand for electricity has grown rapidly since the development of the electricity sector in the early 1970s. This growth has been driven by a rapidly increasing population, dynamic economic growth and low regulated energy prices. In 2018, total Saudi electricity demand reached 299.2 terawatt-hours (TWh).² Saudi Arabia is the 14-largest electricity consumer in the world. Its consumption is similar to that of more populated countries (e.g., Mexico, whose 2019 population was 127.5 million, compared to 34.2 million for Saudi Arabia). It is also on par with more advanced economies (e.g., Italy, whose 2019 gross domestic product (GDP) was \$2,151.4 billion, compared to \$704.0 billion for Saudi Arabia), according to The World Bank.

In recent years, the Saudi government has addressed the rapidly increasing fuel consumption of its power sector by expanding the use of efficient gas plants. This step has reduced the country's reliance on oil and refined products for power generation. Moreover, Saudi policymakers have also enacted some demand-side measures. In 2010, the Kingdom began promoting several efficiency

initiatives to rationalize energy consumption with the establishment of the Saudi Energy Efficiency Center (SEEC 2018). Additionally, the Saudi government implemented the first round of national energy price reforms (EPR) in 2016, with a second round in 2018.

The scale of these recently implemented EPR and efficiency measures is unprecedented in Saudi Arabia. Thus, these policies' potential effects on future demand cannot be assessed based on past experiences. Instead, it is necessary to strengthen the methodological aspects of energy demand projections. Using advanced analytical tools to capture market transformations, behavioral adjustments and interdependencies across economic agents, we can better project electricity demand pathways. In doing so, we build upon the work of Soummane et al. (2022). They develop a hybrid energy-economy computable general equilibrium (CGE) model that accounts for specific features of the Saudi economy. These features include administered domestic energy prices and a currency peg to the United States (U.S.) dollar.

The remainder of this paper is organized as follows. In section 2, we review the literature related to Saudi electricity demand and applications of general equilibrium models in energy-related studies. In section 3, we describe our projection methodology and present the sectoral components of Saudi electricity demand. Section 4 summarizes the scenarios and the underlying assumptions for the demand projections. Section 5 presents the main results of our analysis through 2030, and section 6 concludes the paper.

2. Literature review

2.1. Studies on Saudi electricity demand

To the best of our knowledge, Hasanov (2019) is the only published study that provides partial projections of Saudi electricity demand. Unlike our study, Hasanov (2019) focuses on industrial demand and uses a time horizon of 2025. The author models annual industrial electricity demand from 1984 to 2016. He uses the real price of electricity, industrial value-added, the working-age population and the cost of capital as explanatory variables. The model shows that industrial electricity demand is relatively price and income inelastic, with long-run elasticities of -0.1 and within 0.2-0.3, respectively. Furthermore, the estimations show that active population dynamics and the cost of capital are significant drivers of industrial electricity demand.

Additionally, several previous econometric studies aim to identify the drivers of Saudi electricity demand, focusing on its responsiveness to prices and income. Al-Sahlawi (1990) and Diabi (1998) both estimate aggregate Saudi demand for electricity as a function of income (proxied by real GDP) and real electricity prices. Both studies conclude that Saudi electricity demand is income and price inelastic. Likewise, Al-Faris (2002) models aggregate Saudi electricity demand from 1970 to 1997³ as a function of income (proxied by real GDP) and real electricity prices. He also includes the price of liquefied petroleum gas, an alternative fuel, to capture substitution effects. He finds that Saudi electricity demand is insensitive to price changes but elastic to income, with income elasticities of 0.05 in the short run and 1.65 in the long run.

Atalla and Hunt (2016) model residential electricity demand in GCC countries using annual data from 1985 to 2012. Like other studies, they include the real price of electricity and real GDP as a proxy

for income in their model. They also include the population and weather conditions, captured by heating and cooling degree-days. They find that electricity demand is relatively inelastic to income and prices in the short and long terms. The absolute values of the corresponding elasticities are less than 0.5. However, the population and weather conditions have more significant short- and long-run impacts.

Lastly, two post-EPR studies model Saudi residential electricity demand to estimate price and income elasticities. Aldubyan and Gasim's (2020) model includes electricity prices, real GDP per capita as an income proxy and cooling degree-days to capture weather effects. They confirm that residential electricity demand is price and income inelastic, as they estimate long-term elasticities of -0.09 and 0.22, respectively. However, their decomposition analysis shows that the electricity price hike in 2018 was the key contributor to the observed drop in the demand that year.

Mikayilov et al. (2020) similarly use prices, income and weather to explain residential electricity demand across four regions of Saudi Arabia. Their results confirm that aggregate residential demand is inelastic to price and income changes. However, the results vary significantly across the regions. For instance, the long-term price elasticities range from -0.2 in the central region to -0.5 in the eastern region. Likewise, the long-term income elasticities range from 0.3 in the eastern region to 1.0 in the western region.

We can draw two conclusions from these studies. First, most prior studies develop econometric estimations of Saudi electricity demand. Moreover, they generally focus on aggregate demand or on one segment of aggregate demand (e.g., residential or industrial demand). To the best of our knowledge, no prior study has modeled or projected Saudi electricity demand for several sectors

2. Literature review

simultaneously.⁴ Second, few studies investigate the post-EPR period. However, as described above, the EPR initiated fundamental shifts in electricity demand patterns, and these shifts are likely to persist in the future. These changes must be considered when modeling future demand.

Thus, this study fills two gaps in the existing literature on Saudi electricity demand. First, it models and projects sectoral demand in a consistent framework, capturing interdependencies across sectors through the general equilibrium approach. Second, it accounts for recent changes in electricity demand patterns driven by price reforms and efficiency measures.

2.2. Energy and electricity modeling using the CGE framework

Since Johansen's (1960) seminal work, general equilibrium modeling has been widely used to assess economic, energy and environmental trajectories in the context of significant changes. The purpose of a CGE model is to provide a comprehensive estimation of a policy's effects. Incorporating consumption and production functions within a multi-sector and multi-market framework allows for better estimations of supply and demand relative to partial equilibrium models. CGE models can capture market interactions, penetrations of price shifts in the input-output matrix and consecutive adjustments of input trade-offs. Ultimately, they can capture household consumption.

Most recent studies applying CGE frameworks in an energy context estimate the energy demand response to price shifts, production mix evolutions

and subsidy reforms. Lin and Jiang (2011), Liu and Li (2011) and Chi et al. (2014) investigate the impacts of subsidy reforms on energy demand and macroeconomic indicators in China. Kat et al. (2018) use a CGE framework to analyze the prospects of various energy scenarios in Turkey and the underlying emissions trajectories. Böhringer and Rutherford (2013) explore energy and emission scenarios for Poland. One recent application of a CGE model to Kuwait, a GCC country, shows that energy subsidy reforms have beneficial effects on economic diversification (Shehabi 2020). Another such study finds that using direct transfers to compensate for electricity subsidy reforms can offset welfare losses (Gelan 2018).

Holmøy (2005) and He et al. (2011) apply CGE models to investigate electricity demand. Specifically, they estimate the sensitivity of electricity demand to changes in electricity prices in Norway and China, respectively. These studies emphasize the prominent role of substitution elasticities of demand functions. Beckman et al. (2011) show that an adequately parameterized CGE model replicates historic energy demand and supply trajectories well.

Several studies use the CGE framework to investigate specific policy issues related to the Kingdom. These issues include behavior within the oil market (De Santis 2003), the abrogation of trade tariffs (Al-Hawwas 2010) and exchange rate policies (Al-Thumairi 2012). Soummane et al. (2019) and Soummane et al. (2022) recently developed a CGE model for the Kingdom that acknowledges certain features of the Saudi economy. This model includes administered energy prices within a detailed representation of the energy sector to assess economic diversification outcomes.

3. Methodology

3.1. CGE model with improved electricity demand characteristics

This study employs IMACLIM-SAU, an economy-wide dynamic CGE model that embodies specific features of the Saudi economy. We extend Soummane et al. (2019) and Soummane et al. (2022) by improving the

model's representation of electricity demand. The model covers 13 sectors, as reported in Table 1. To be concise, we describe only the model features related to the electricity sector in this section. In Annex A, we summarize the main socioeconomic drivers of the scenarios that we explore. Soummane et al. (2022) provide a detailed algebraic description, calibration procedures and data treatments for the model.

Table 1. Sectoral coverage of IMACLIM-SAU.

Abbreviation	Sector
<i>Energy</i>	
OIL	Crude oil
GAS	Natural gas
RFN	Refining
ELE	Electricity
<i>Non-energy</i>	
AGR	Agriculture, hunting, forestry and fishing
MIN	Other mining (excluding oil and gas extraction)
CHM	Chemicals and petrochemicals
NMM	Non-metallic minerals (including cement)
MAN	Manufacturing
PRV	Private sector services
PUB	Public services
TRA	Transport: air and sea
OTP	Other transport

3. Methodology

Our model maintains three important specifications of Soummane et al. (2019) and Soummane et al. (2022). We maintain the model's closure and relationship between the trade balance and real effective exchange rate. We also maintain the correlation between the average wage and unemployment rate.

However, our model departs from that of Soummane et al. (2022) in two ways to better represent electricity demand. First, we adjust the sectoral definitions to separate private and government services. The latter consume a significant amount of electricity, comprising 13.2% of total demand on average between 2013 and 2018. Second, we assume that households' consumption of energy goods (i.e., refined products and electricity) is income and price elastic. The original model treats this consumption as exogenous (imported from bottom-up expertise). For non-energy goods, we maintain Soummane et al.'s (2022) formulation of constant shares of the budget remainder (i.e., the budget net of energy expenses).

The consumption function that we adopt for residential electricity demand helps address the shortcomings of using GDP as a proxy for income. Indeed, Atalla and Hunt (2016) highlight that household income is more appropriate than GDP per capita in this setting. In GCC countries, GDP per capita is highly correlated with oil prices.⁵ Similar to Le Treut (2017), we formulate household consumption of energy goods C_i as follows:⁶

$$\forall i \in \{OIL, GAS, REF, ELE\} C_i = \left(\frac{p_{C_i}}{CPI} \frac{1}{p_{C_{i_0}}} \right)^{\sigma_{CPI}} \left(\frac{R_c}{CPI} \frac{1}{R_{c_0}} \right)^{\sigma_{CR_i}} C_{i_0} \quad (1)$$

Here, σ_{CPI} and σ_{CR_i} are the price and income elasticities, respectively. p_{C_i} and R_c are the consumer price of energy good i and consumed income, respectively. An index of 0 denotes the calibration value of a variable, that is, the 2013 value.

For households, oil and gas consumption are essentially nil, and thus, we only need the values of price and income elasticities for ELE and RFN. We derive these values from the estimates of Hasanov et al. (2020) and Mikayilov et al. (2019), respectively. Thus, for ELE, the income and price elasticities are set to 0.33 and -0.13, respectively, and for RFN, they are set to 0.13 and -0.27, respectively. We compute household incomes using assumptions regarding the macroeconomic income distribution that are described in Annex A.2 of Soummane et al. (2022).

The production function of goods and services, including electricity,⁷ takes a nested form. To simulate distinctive scenarios for price reforms and intensity gains, the model includes two alternative production specifications. In the first (Specification 1), capital, labor and electricity are substitutable inputs in the lower stage of the production function. They are incorporated in a constant elasticity of substitution function to create electrified value-added.⁸ In the upper stage, electrified value-added is combined with all energy products except ELE to produce a composite good (VA_E) based on a Leontief function. VA_E is then combined with materials (i.e., non-energy products, denoted as M) to produce domestic output Y . In this specification, electricity use intensities (i.e., units of ELE per unit of Y) are endogenously determined from the modeled prices of electricity and other factors. This specification is common to all sectors.

The second specification (Specification 2) uses a similar nested production function. However, in this specification, electricity intensities, like the intensities of other energy goods, are determined exogenously. The intensities of other energy goods remain constant at their calibration year levels. In both specifications, regulated energy prices (including ELE prices) are implemented using agent-specific margins to reflect differences

in agent-specific tariffs using output costs. This implementation is presented in Annex B.6 of Soummane et al. (2022).

3.2. Simulation of 2014-2018 Saudi electricity demand

One way to validate CGE models and increase their credibility is to test their performance against historical data (Devarajan and Robinson 2002). Thus, in this section, we test our model's ability to replicate sectoral electricity demand for 2014-2018. As Soummane et al. (2022) describe, IMACLIM-SAU is calibrated on the base year of 2013. Additionally, the period from 2014 to 2017 is used to calibrate the macroeconomic variables (i.e., GDP, capital dynamics, the unemployment rate and the trade balance). In this study, we maintain this specification.


For residential electricity demand, we implement the price- and income-elastic demand function given by Equation 1. For intermediate electricity uses (i.e., industrial, commercial and government electricity demand), we implement the two specifications described in the previous subsection. In the first specification, electricity intensities are adapted to regulated prices to reflect producers' input trade-offs. In the second specification, we set electricity intensities

exogenously to reflect 2014-2018 electricity consumption per unit of sectoral output, following SAMA (2019). Thus, the test for this specification indicates our model's ability to replicate sectoral activity levels.⁹ For agriculture, we keep the electricity intensity constant over the calibration years in both specifications given its small share of electricity consumption (2% in 2013). Electricity prices are average sectoral prices based on observed regulated tariffs weighted by consumption brackets, as Soummane (2021) presents.

For both specifications, the simulated total demand is, on average, within 2.8% of the observed total demand. Residential demand, which is simulated using the consumption function with price and income elasticities, captures the effects of the slower income increase and EPR. The estimated trajectories again fluctuate around the observed values by 2.8% on average. For industrial, commercial, governmental and agricultural use, the modeled consumption values replicate the actual values fairly closely. The deviations from the actual values are below 11% on average in all segments under both specifications. The slight overestimations of industrial and commercial demand are compensated by the underestimation of governmental demand (Figure 1).

3. Methodology

Figure 1. Modeled versus observed electricity demand across sectors, 2013-2018.

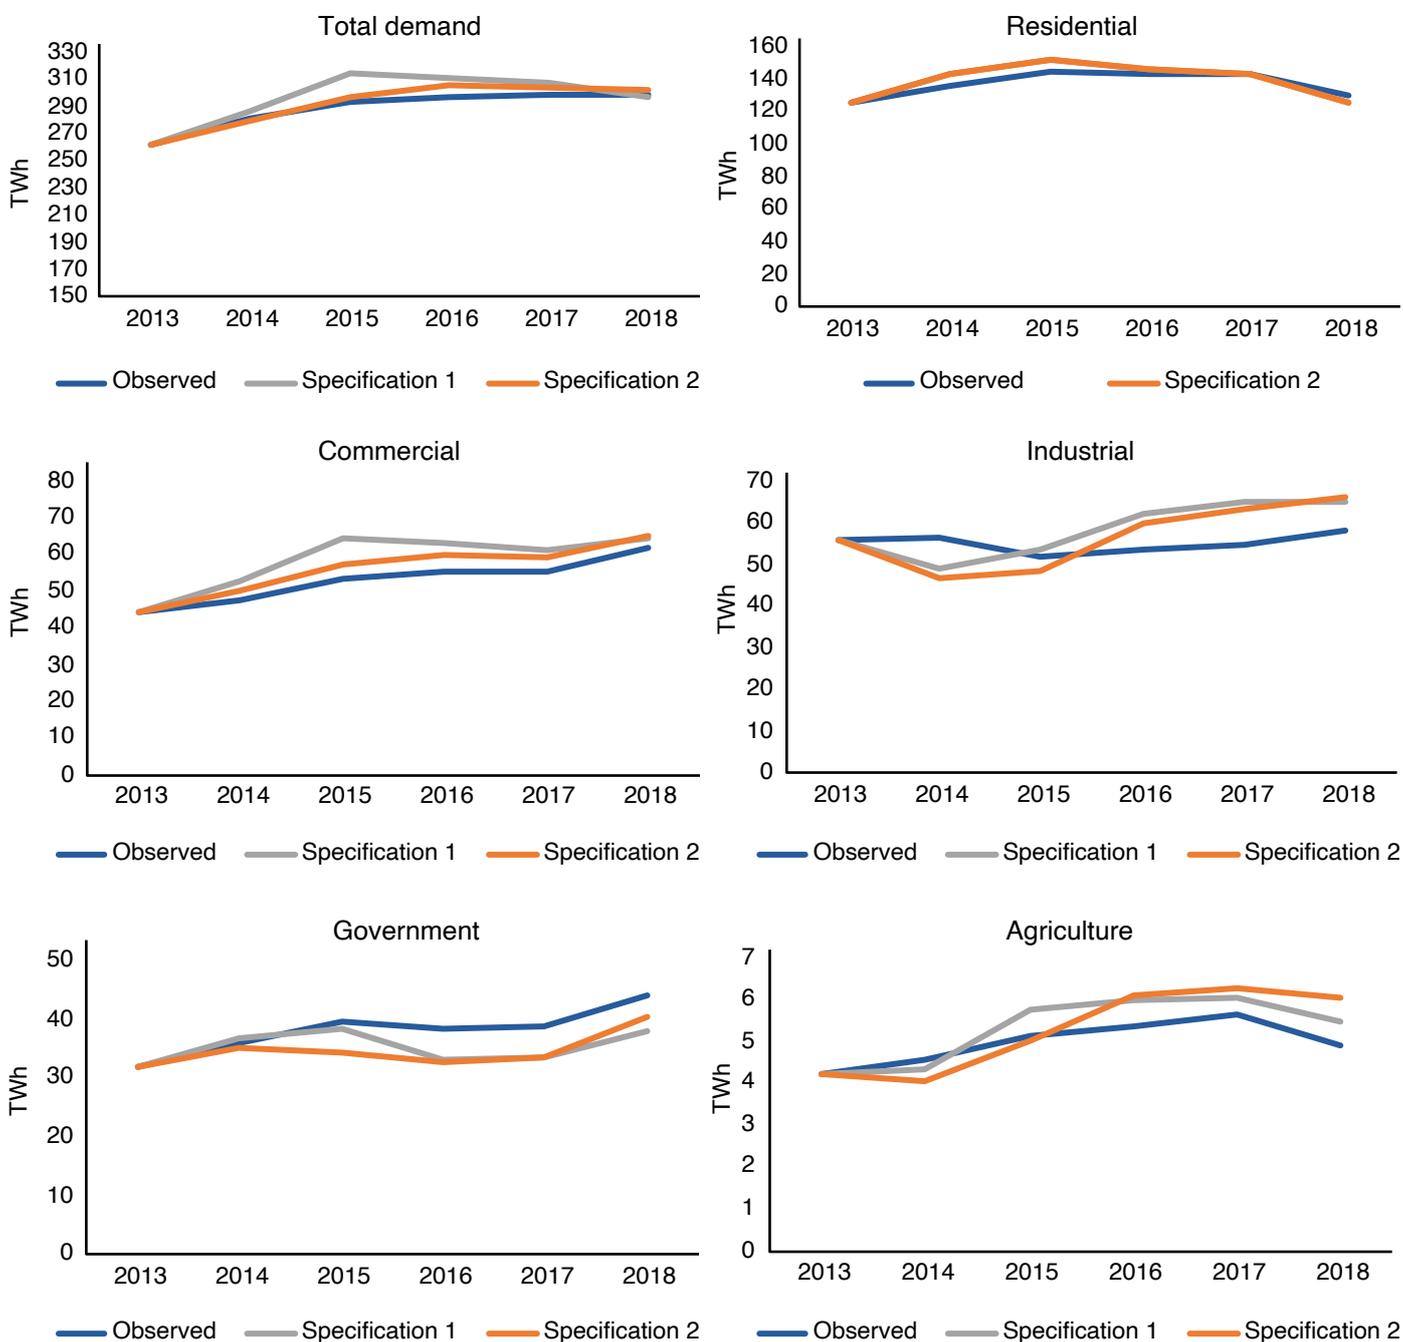

Sources: ECRA (2018) for observed demand and IMACLIM-SAU results for modeled trajectories. Specification 1 uses endogenous electricity intensities, and specification 2 uses exogenous electricity intensities. Estimated versus observed sectoral activities are the remaining sources of discrepancy in specification 2.

4. Electricity demand scenarios through 2030

This section describes our projection scenarios and their underlying drivers and assumptions. For sectoral demand projections, we consider three scenarios reflecting Saudi electricity demand pathways under price reforms and energy efficiency measures to reduce electricity intensities. We simulate a reference scenario (REF) and two alternative scenarios. These alternative scenarios are called the price reform scenario (PR) and energy efficiency scenario (EE). The three scenarios use similar trajectories for socioeconomic indicators (i.e., the active population, labor productivity, oil prices, oil output, investment and non-energy exports). They differ only in aspects related to the electricity sector, as the following subsections explain. Annex A describes the socioeconomic indicators in more detail.

4.1. Reference scenario

In this scenario, intermediate and final electricity prices remain at their 2018 levels through 2030. For the residential sector, prices are 139% greater than pre-EPR levels. For industry (IND), which corresponds to MIN, CHM, NMM and MAN in our nomenclature (Table 1), prices are 20% greater than pre-EPR levels. For PRV, PUB and AGR, prices are 20%, 30% and 50% greater than pre-EPR levels, respectively. The projected REF scenario is based on Specification 2; that is, the specification with exogenous electricity intensities. This specification deviates less from the observed 2013-2018 demand than Specification 1 does (see section 3.2).¹⁰ In this scenario, we assume that the enforced intensity levels for IND, PRV, PUB and AGR remain constant at their 2013-2018 averages through 2030. This assumption avoids unduly placing a higher weight on the intensity in any specific year.

4.2. Price reform scenarios

In this scenario, we consider additional price reforms beyond the two EPR rounds that have already taken place. The Saudi government's Fiscal Balance Program plans to progressively increase energy prices to meet "*market levels*." This plan has been highlighted as Saudi Arabia's most important initiative (Kingdom of Saudi Arabia 2017; Kingdom of Saudi Arabia 2019).

This scenario builds on Specification 1 of the production function (see section 3.1). This specification endogenizes electricity intensities to allow for trade-offs with value-added if electricity prices increase. We investigate two variants of price increases based on different international references. In the first variant, denoted as PR-EM, electricity prices converge to the average price across emerging countries in the G20, a group of leading rich and developing nations. In the second variant, denoted as PR-AVG, electricity prices converge to the average price across all G20 countries.¹¹

In the first variant (PR-EM), residential prices grow 72% higher than their post-EPR levels. They ultimately approach current prices in China and South Africa. Nevertheless, they remain two times lower than prices in countries with similar incomes (i.e., GDP per capita) to Saudi Arabia. Examples of such countries are the Czech Republic, Poland and Slovakia. Reforming the industrial segment's energy prices is a sensitive issue. Saudi Arabia has a large (mainly energy-intensive) industrial base that is integrated with the crude oil and natural gas value chain. However, additional moderate reforms are necessary to support the economic viability of the country's power system (Anouti et al. 2020).

4. Electricity demand scenarios through 2030

We seek to reflect this tension between reforming electricity prices and preserving local industrial competitiveness. Thus, we exclude the two countries with the highest industrial electricity prices, Brazil and India, from the computation of the prevailing industrial price in the PR-EM variant. As a result, the industrial electricity price in 2030 is 43% higher than the post-EPR price, which is maintained in the REF scenario. Hasanov (2019) applies a similar price increase to the Saudi industrial segment based on matching the U.S. industrial electricity price for 2008-2017. For the remaining sectors, that is, PRV, PUB and AGR, we assume a similar conservative electricity price increase of 43% from post-EPR levels by 2030.

The second variant (PR-AVG) assumes that residential prices triple from their 2018 levels by 2030. As in the PR-EM variant, we exclude the countries with the two highest electricity prices (now Italy and Japan) from the computation for industrial prices. Under this assumption, industrial prices double by 2030 from their current levels. This price increase is again similar to the targeted industrial price in the Hasanov (2019) alternative scenario.¹² Finally, we assume that the other sectoral prices double by 2030 compared to their 2018 levels. Table 2 summarizes our assumptions for the PR.

Table 2. Assumptions for the two price reform scenarios (Saudi riyals [SAR]/kilowatthour).

Variant	Sector	2013	2018	2025	2030	Δ 2018-2030
PR-EM	Residential	0.08	0.19	0.25	0.32	+72%
	Industrial	0.15	0.18	0.22	0.26	+43%
	Commercial	0.22	0.26	0.32	0.37	+43%
	Government	0.26	0.32	0.39	0.46	+43%
	Agriculture	0.11	0.17	0.21	0.24	+43%
PR-AVG	Residential	0.08	0.19	0.35	0.56	+200%
	Industrial	0.15	0.18	0.27	0.36	+100%
	Commercial	0.22	0.26	0.39	0.52	+100%
	Government	0.26	0.32	0.48	0.64	+100%
	Agriculture	0.11	0.17	0.25	0.34	+100%

Sources: The authors' computations of 2013 and 2018 data are based on Nachet and Aoun (2015), Kingdom of Saudi Arabia (2017), APICORP (2018) and Hasanov (2019). The assumptions for projected values are based on data from Enerdata (2021).

Finally, we highlight one important feature of our model of the electricity sector in this scenario. In our model, electricity is treated as one homogenous good. In other words, its production is a top-down function, meaning that we do not differentiate between discrete generation technologies from a bottom-up perspective. This approach provides valuable indications of consumers' reactions to price changes. However, it cannot comprehensively illustrate the evolution of the supply-side mix or the costs facing technical constraints. Wing (2006), Cai and Arora (2015) and Kat et al. (2018) describe ways to integrate electricity sector technology within a CGE framework in detail. We consider this integration as a potential direction for future work on the Saudi electricity market.

4.3. Energy efficiency scenarios

In this scenario, changes in sectoral demand relative to the REF scenario are driven by decreases in the electricity intensities of different production types. Saudi authorities have set energy efficiency measures targeting various power-consuming segments to contain electricity demand growth.¹³

The government established the SEEC to set and coordinate national programs to rationalize energy consumption in buildings, industry and transportation. These sectors are responsible for 90% of domestic energy consumption (SEEC 2018). Furthermore, the national utility company, the Saudi Electricity Company (SEC), has taken various measures to rationalize power consumption in the industry and services sectors. These measures are an application of the national strategy to reform the energy sector (Kingdom of Saudi Arabia 2017).¹⁴

The energy efficiency (EE) scenario uses Specification 2 for the production function (see

section 3.1), that is, we assume that the intensities of electricity use are exogenous. We simulate two variants of the EE: Moderate (EE-Mod) and High (EE-High). In these variants, we adjust the sectors' exogenous electricity intensities (i.e., the electricity demand per unit of output). This specification therefore comprises the industry (RFN, MIN, CHM, NMM and MAN), commercial (PRV), government (PUB) and agriculture (AGR) sectors. We set residential electricity consumption based on the assumptions described below.

In the EE-Mod variant, we assume that the electricity intensity for IND decreases by 14% relative to 2018 by 2030. In other words, it decreases by 1.2% per year on average over this period. This decline corresponds to half of the electricity intensity improvement achieved between 2013 and 2018. During this period, the SEEC monitored the implementation of efficiency measures in existing and new plants (SEEC 2018). We do not assume that this trend continues at the same level in the EE-Mod variant. The Saudi industrial base, whose energy mix is dominated by oil and gas, already has the lowest electricity intensity among the G20 countries.¹⁵

We assume that the electricity intensities of PRV, PUB and AGR decrease by 23% between 2018 and 2030 (i.e., 2.2% per year). This efficiency gain corresponds to the savings estimated by Krarti et al. (2017) for Saudi buildings, including commercial and governmental buildings. They estimate these savings based on actions with no significant costs, such as thermostat adjustments or replacements of existing lighting. Finally, we assume that residential electricity consumption decreases by 10% between 2018 and 2030 (i.e., 0.9% per year). This assumption is based on the cost-free gains in Saudi residential buildings estimated by Krarti et al. (2017).

4. Electricity demand scenarios through 2030

In the EE-High variant, we assume that the observed 2013-2018 efficiency gains for IND of 2.4% per year continue through 2030. For PRV, PUB and AGR, we assume that intensity falls by 50% from 2018 to 2030 (i.e., 5.6% per year). This assumption corresponds to the Level-3 efficiency improvements

estimated by Krarti et al. (2017).¹⁶ Finally, we assume that residential electricity demand decreases by 26% from 2018 to 2030 (i.e., 2.5% per year). This assumption is based on the higher efficiency gains estimated by Krarti et al. (2017). Table 3 summarizes the intensity assumptions of the EE scenarios.

Table 3. Electricity intensities of the energy efficiency scenarios (index = 1 in 2013).

Variant	Sector	2013	2018	2025	2030	Δ 2018-2030
EE-Mod	Residential ^a	1.00	1.14	1.08	1.03	-10%
	Industrial	1.00	0.85	0.72	0.64	-25%
	Commercial	1.00	1.23	1.05	0.94	-24%
	Government	1.00	1.25	1.07	0.95	-24%
	Agriculture	1.00	1.00	0.85	0.76	-24%
EE-High	Residential ^a	1.00	1.14	0.96	0.84	-26%
	Industrial	1.00	0.85	0.57	0.43	-50%
	Commercial	1.00	1.23	0.84	0.64	-48%
	Government	1.00	1.25	0.85	0.65	-48%
	Agriculture	1.00	1.00	0.68	0.52	-48%

^a Scenarios of residential sector are for the sector's total consumption.

Source: Authors' estimates based on ECRA (2018), Enerdata (2021) and SAMA (2019) for 2013 and 2018. Authors' assumptions for projected values.

Finally, we highlight one important aspect of this scenario's narrative. We model *efficiency* only variants to assess the potential energy savings that can be achieved under various intensity targets. Although efficiency measures may incur some costs, such as investments in new appliances or retrofitting, we consider these costs to be insignificant. The prevailing electricity intensity in Saudi Arabia is high compared with other countries. This comparison may be biased for industrial consumption, as the Kingdom's power mix is dominated by fossil fuels. Nevertheless,

Saudi electricity demand can be significantly reduced through costless or very-low-cost policies with relative immediate feasibility. Such policies may include awareness campaigns, updates to regulations to improve codes and standards for new buildings, and the introduction of dynamic pricing (Faruqui et al. 2011). Moreover, the current deployment of smart meters in the Kingdom will help with tracking and reducing inefficient electricity use.¹⁷ Finally, the mid-term projection horizon suggests that energy intensity reductions may be achievable through demand-side management measures, as we assume in the efficiency variants.

5. Results

We begin our discussion of the results by presenting the electricity demand in the REF scenario. In this scenario, total electricity demand reaches 365.4 TWh in 2030, up from 299.2 TWh in 2018. In the period without statistical data, that is, from 2019 to 2030 (see section 3.2), projected demand growth is significantly below its historical trend. Between 2009 and 2018, total electricity demand grew at 5.3% per year on average. In contrast, we project average electricity demand growth of 1.6% per year between 2019 and 2030.

Before discussing the long-term outcomes by sector, we highlight two observations related to the aggregate results for the early projected years. First, the modeled demand declines by 1.5% in 2019. This result occurs because we assume that the electricity intensities for the IND, PRV and PUB sectors maintain their 2013-2018 averages throughout the projection period (see section 4.1). This finding does not have significant implications for the relevance of our results. Indeed, preliminary data for 2019 indicate that total Saudi electricity sales fell by about 1% (Soummane 2020).

Second, we consider the effects of the 2020 COVID-19 pandemic and the associated lockdown measures on electricity demand. In many regions worldwide, electricity demand dropped significantly. However, Saudi electricity consumption data suggest that demand remained roughly stable in the Kingdom. The higher contributions of the residential sector and warmer weather may have offset the impacts of the pandemic (Soummane and Peerbocus 2020).

We now consider the sectoral breakdown of demand in the REF scenario. The residential sector remains the primary consumer of electricity. However, its share drops from 43.6% of the total electricity

demand in 2018 to 39.0% in 2030 in this scenario. The two EPR rounds significantly impacted residential demand. In 2016, residential demand started to flatten for the first time. It then declined by 9.1% in 2018. The average growth rate between 2009 and 2018 therefore dropped to 3.2%.¹⁸ Under our assumption that real prices remain at 2018 levels, residential demand slowly recovers at an average rate of 1.1% per year between 2019 and 2030, ending at 142.4 TWh.

In the other sectors, electricity demand grows faster than in the residential sector. Indeed, keeping electricity intensities stable results in electricity demand increasing in line with the sectors' outputs. IND's output grows at a rate of 1.8% through 2030, and its electricity demand increases from 58.2 TWh in 2018 to 81.9 TWh in 2030. IND comprises 22.4% of the total electricity demand in 2030 in the REF scenario, a 3.0 percentage point (pp) increase from its share in 2018.


In the PRV sector, electricity demand reaches 82.1 TWh in 2030, up from 61.8 TWh in 2018. This sector's electricity demand is projected to grow at a rate of 1.9%. It accounts for 22.5% of the total electricity demand in the REF scenario in 2030, a 6.8 pp increase over 2018. In the PUB sector, electricity demand reaches 51.5 TWh in 2030, up from 43.9 TWh in 2018. The annual growth rate of electricity demand in this sector between 2019 and 2030 is 2.1%, which is in line with projected output growth. This sector's demand accounts for 14.2% of the total electricity demand in the REF scenario in 2030. This share reflects a decrease from 19.7% in 2018, but it is similar to PUB's 2013 share of total demand. PUB's average electricity intensity over 2013-2018 is 12.8% higher than the 2013 calibration level. If PUB maintains this electricity intensity over the projected period, electricity demand in this sector grows slightly faster than in the IND and

5. Results

PRV sectors. Finally, electricity demand in AGR is projected to increase at an average annual rate of 1.7%. It is expected to reach 7.4 TWh by 2030, up

from 4.9 TWh in 2018. This sector's demand is only 2.0% of total demand in 2030, up slightly from 1.6% in 2018 (Figure 2).

Figure 2. Electricity demand by sector in the REF scenario.

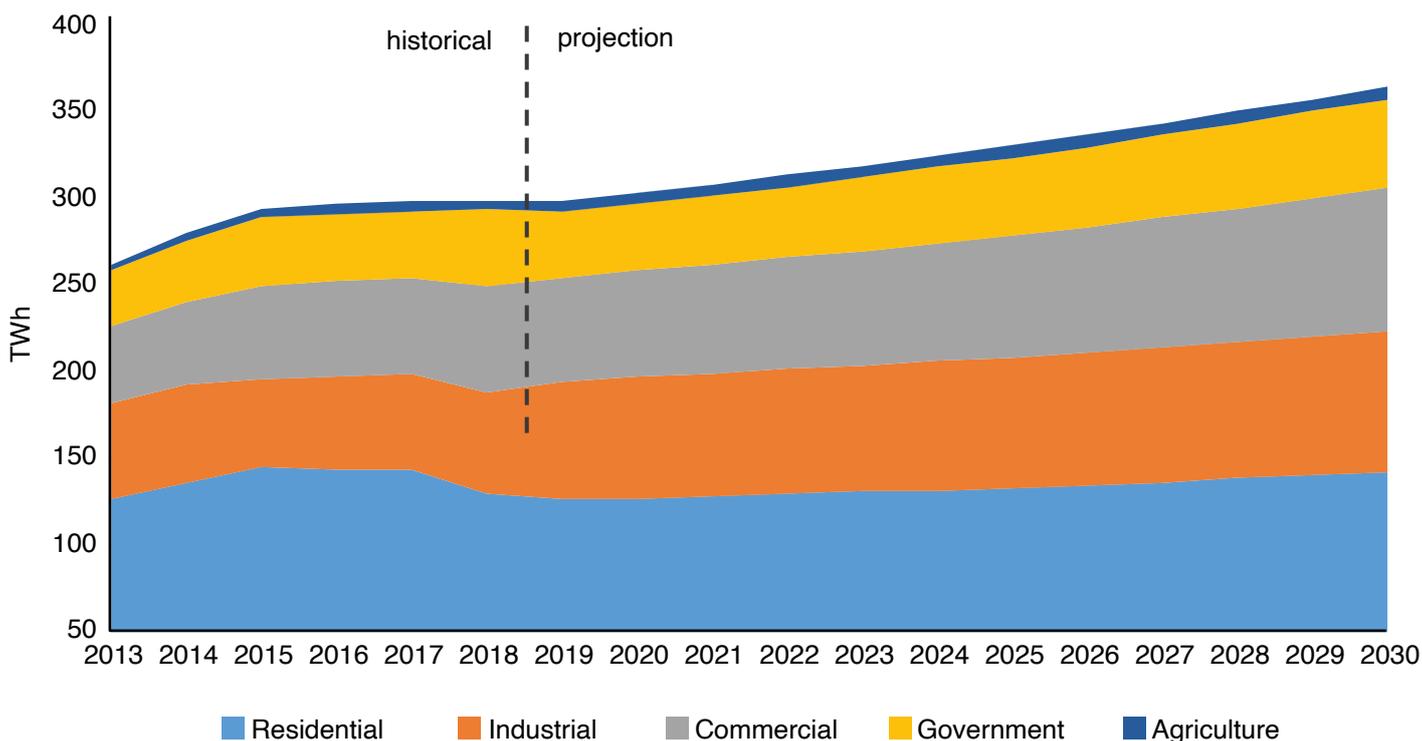

Sources: ECRA (2018) for 2013-2018 data. IMACLIM-SAU for projected values.

Next, we analyze the alternative demand scenarios. Figure 3 illustrates the impacts of price reforms and efficiency measures on electricity demand. Aligning domestic electricity prices with those of emerging G20 countries (PR-EM variant) reduces annual demand growth by half compared with the REF scenario. Specifically, demand growth in the PR-EM variant is 0.7% per year between 2019 and 2030, compared with 1.6% per year for REF. In 2030, total demand in the PR-EM variant is 40.5 TWh less than that in the REF scenario (i.e., 11.1% lower). Further tariff increases to meet average G20 price


levels (PR-AVG variant) result in roughly stable total demand over the projection horizon. The growth rate is -0.1% per year on average through 2030. Total demand in this scenario is 71.6 TWh less than in the REF scenario (i.e., 19.6% lower).

In the EE scenarios, efforts to reduce electricity intensity in the IND, PRV and PUB sectors, along with reduced residential demand, drive higher energy savings. By 2030, achieving the objectives of the EE-Mod variant flattens electricity demand over the projection horizon. In 2030, aggregate electricity

demand is 45.6 TWh lower in the EE-Mod variant than in the REF scenario (i.e., 12.5% lower). The larger efficiency gains of the EE-High variant reduce total electricity demand by 2.2% per year on

average. This decrease is equivalent to around 6 TWh per year through 2030. In 2030, total demand is 118.7 TWh lower than in the REF scenario (i.e., 32.5% lower).

Figure 3. Total electricity demand by scenario.

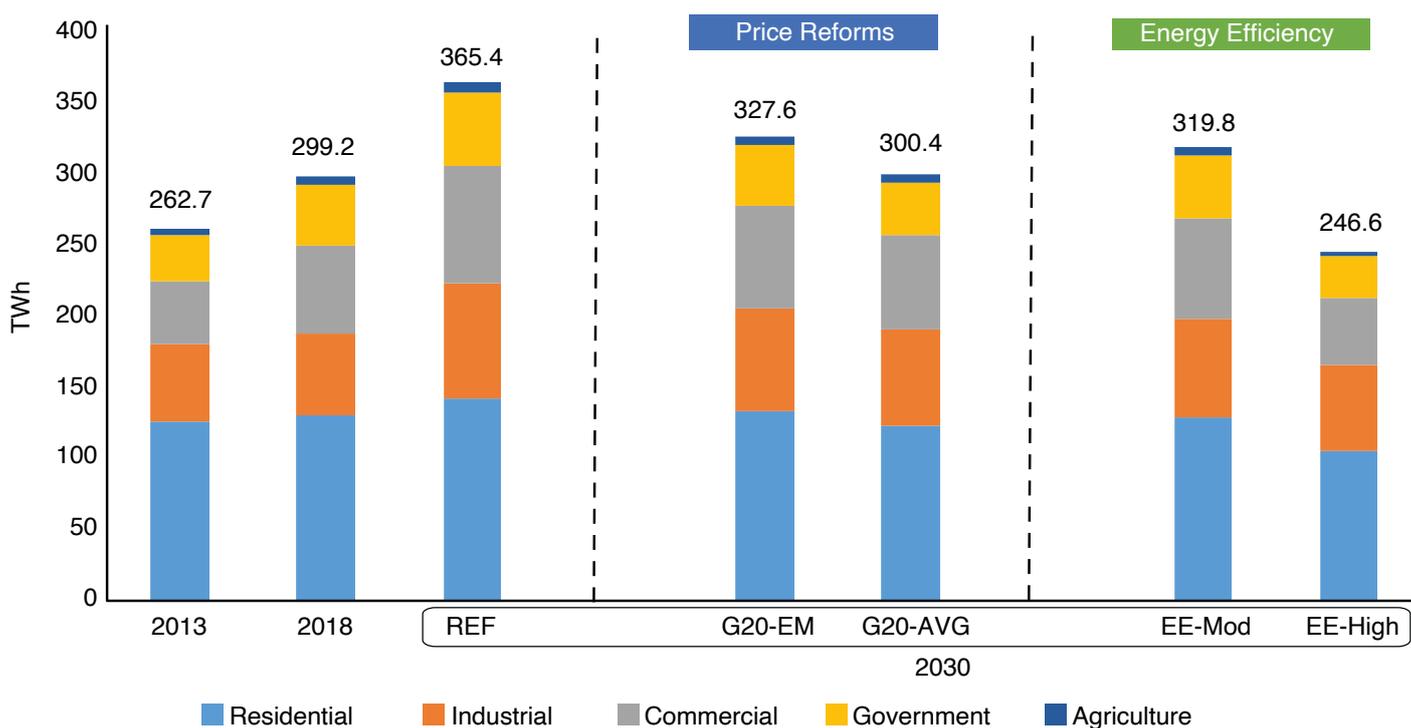

Sources: ECRA (2018) for 2013 and 2018. IMACLIM-SAU results for projected values.

The electricity consumption patterns in the two alternative scenarios are similar to those in the REF scenario. The residential segment remains the largest consumer of electricity in all scenarios. In the PR-EM and PR-AVG variants, residential demand accounts for 40.8% and 41.5% of total demand in 2030, respectively. By comparison, it accounts for 39.0% of total demand in the REF scenario. The shares of most of the other sectors in the PR-EM and PR-AVG variants are similar to those of the REF scenario. The exception is PUB's demand, which decreases slightly from 14.4% in the REF scenario

to 12.9% and 12.3% in the PR-EM and PR-AVG variants, respectively.

In the EE-Mod and EE-High variants, residential demand in 2030 accounts for 40.4% and 43.1% of total demand, respectively. Moreover, the shares of IND in total demand in 2030 are 21.7% and 24.7% in the EE-Mod and EE-High variants, respectively. These shares are similar to those in the REF scenario. The shares of the remaining sectors in total demand are roughly similar for the EE-Mod variant and the REF scenario. They are slightly


5. Results

lower in the EE-High variant than in the REF scenario.

The PR-EM and PR-AVG variants achieve electricity savings of 40.5 TWh and 71.6 TWh, respectively, in 2030 (Figure 4). In the PR-EM variant, the main electricity-consuming sectors reduce their consumption by around 10 TWh each. AGR, whose consumption is relatively marginal, contributes savings of 1.6 TWh. In this variant, the residential sector reduces its

consumption by 7.0% relative to REF by 2030. IND and PRV reduce their relative consumption by around 12%, and PUB's relative consumption falls by 18.4%. In the PR-AVG variant, residential demand is 14.3% less than in the REF scenario in 2030, amounting to savings of 20.4 TWh. IND and PRV contribute 16.2 TWh and 17.3 TWh, respectively, to demand savings. These declines correspond to abatements of 19.8% and 21.1%, respectively, relative to the REF scenario in 2030.

Figure 4. Sectoral differences in the PR and EE scenarios relative to the REF scenario in 2030.

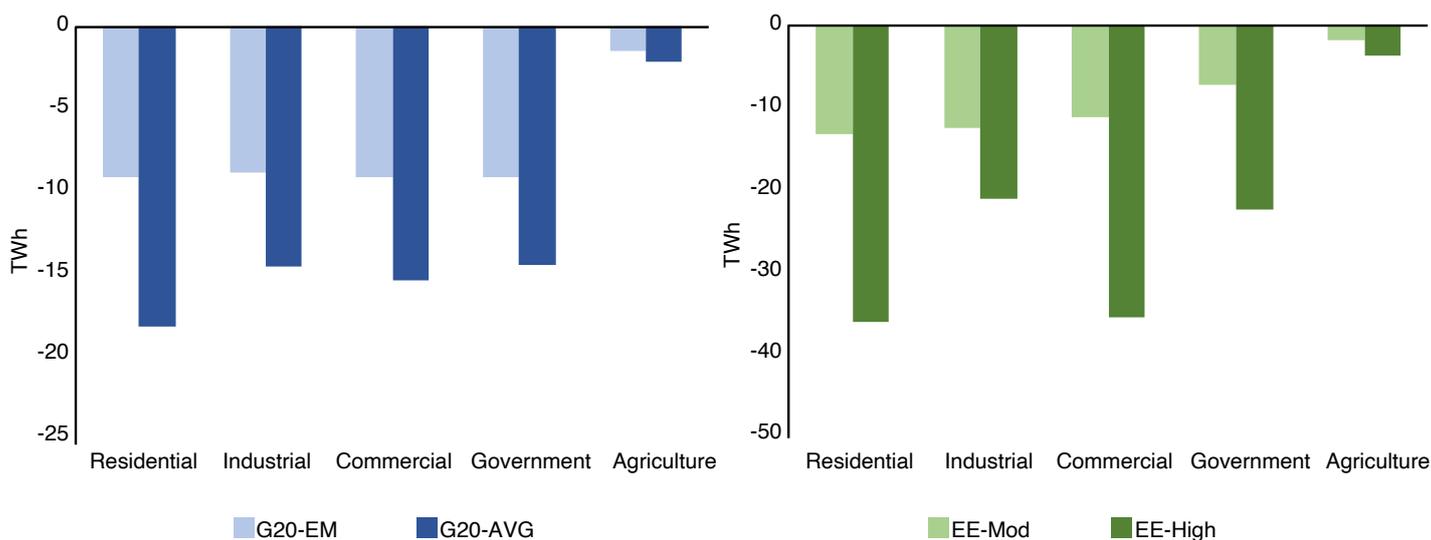

Sources: IMACLIM-SAU simulation results.

The electricity demand savings of the EE scenarios are greater than those of the PR scenarios. Relative to the REF scenario, electricity demand is 45.6 TWh and 118.7 TWh lower in 2030 under the EE-Mod and EE-High variants, respectively. The residential sector accounts for declines of 13.1 TWh and 36.1 TWh, respectively. The efficiency gains for intermediate users result in significant demand abatement. Consumption in the IND sector is 12.5 TWh (-15.3%) and 21.1 TWh (-25.7%) lower under

the EE-Mod and EE-High scenarios, respectively, than under the REF scenario in 2030. Likewise, demand in the PRV and PUB sectors is 11.2 TWh and 7.2 TWh lower under the EE-Mod variant, respectively. In both sectors, demand is about 14% lower than in the REF scenario. In the EE-High variant, the PRV and PUB sectors achieve electricity savings of 35.6 TWh and 22.3 TWh, respectively. Demand in these sectors is about 43% lower in this scenario than in the REF scenario.

Table 4 reports the main macroeconomic indicators for our scenarios. The overall outcomes of our alternative scenarios are positive compared with the REF scenario. Indeed, real GDP is higher in all four variants than it is in the REF scenario, and it is the highest in the EE scenario. The differences in real GDP across our scenarios stem from the contrasting effects of lower electricity demand on households' revenues and the public budget.

In the PR scenario, price hikes to meet international benchmarks negatively impact households' purchasing power and, ultimately, their real revenue. In 2030, households' real revenue is 0.6% (SAR 10.0 billion) lower in the PR-EM variant than in the REF scenario. The corresponding figure for PR-AVG is 3.2% (SAR 50.4 billion). However, the price increases in the PR scenario positively impact the public balance because they alleviate the burden of government subsidies. In 2030, the public budget balance (as a share of GDP) is 1.7 pp higher in the PR-EM variant than in the REF scenario. It is 4.1 pp higher in the PR-AVG variant

than in the REF scenario. The accumulated budget balance gains for PR-EM and PR-AVG yield net debt gains (as a share of GDP) of 16.3 pp and 41.9 pp, respectively, in 2030 compared with the REF scenario.

Modeling electricity demand in a general equilibrium framework allows us to compute the implications of simulated scenarios from a macroeconomic perspective. Ultimately, the overall positive impacts on GDP of 0.72% in PR-EM and 0.75% in PR-AVG are mainly driven by higher public spending. The government's fiscal outlook is better in these scenarios than in the REF scenario. However, the deterioration of household revenue in these scenarios translates into weaker domestic demand. Thus, although the net effect on GDP is positive, the unemployment rate is higher in the PR scenario than in the REF scenario. The unemployment rates in the PR-EM and PR-AVG variants are 0.2 pp and 1.1 pp higher than in the REF scenario, respectively. These numbers correspond to 31,000 and 172,000 jobs lost, respectively.

Table 4. Macroeconomic indicators by scenario.

Variable	2013	REF 2030	Difference from REF in 2030			
			PR-EM	PR-AVG	EE-Mod	EE-High
Real GDP (billions of 2013 riyals)	2,773.3	4,177.2	+0.7%	+0.8%	+0.9%	+2.5%
Unemployment rate	5.6%	7.4%	+0.2 pp	+1.1 pp	-0.3 pp	-0.8 pp
Trade balance (% of GDP)	24.6%	8.7%	+0.4 pp	+1.2 pp	+0.1 pp	+0.2 pp
Government budget balance (% of GDP)	8.8%	2.9%	+1.7 pp	+4.1 pp	+0.3 pp	+0.7 pp
Net public debt (% of GDP)	-95.9%	-108.0%	-16.3 pp	-41.9 pp	-2.0 pp	-4.8 pp

Source: IMACLIM-SAU simulations. pp = percentage points.

5. Results

As mentioned above, the EE scenario yields higher gains from a macroeconomic perspective. Indeed, fostering efficiency benefits both household revenue and the public budget. Reducing the intensity of electricity use lowers overall electricity consumption in the targeted sectors, thereby decreasing public spending on financial incentives. The government balance improves by 0.3 pp and 0.7 pp in the EE-Mod and EE-High variants, respectively. Net debt as a share of GDP is 2.0 pp and 4.8 pp lower in the EE-Mod and EE-High variants than in the REF scenario, respectively.

Moreover, the EE-Mod variant reduces the revenue loss relative to the PR scenarios, and the EE-High

variant provides some revenue gain. In 2030, households' real revenue differs by -0.4% and +0.8% under the EE-Mod and EE-High variants, respectively, compared with the REF scenario. Domestic consumption is consequently higher in the EE scenarios, resulting in improved employment outlooks. In 2030, the unemployment rates are 0.3 pp and 0.8 pp lower under the EE-Mod and EE-High variants, respectively, compared with the REF scenario. These numbers correspond to 42,000 and 126,000 jobs created, respectively. In 2030, GDP is 0.9% and 2.5% higher in the EE-Mod and EE-High variants, respectively, than in the REF scenario. This result is driven by a combination of a positive fiscal outlook and greater household revenue.

6. Conclusions

The Saudi electricity sector is undergoing structural changes. For decades, it grew rapidly, supported by government incentives through regulated low prices for electricity consumption. These demand trajectories were deemed unsustainable, threatening the government's fiscal sustainability and crowding out valuable fossil fuel exports. In recent years, the authorities have launched ambitious programs to curb demand growth and reduce wasteful uses of electricity. These public action plans have not only reformed prices but also promoted efficiency measures.

Given these structural changes, this study presents trajectories for future Saudi electricity demand through 2030. We discuss options for reducing electricity demand in different sectors while maintaining economic growth. The results from our pricing reform and energy efficiency scenarios can provide Saudi policymakers with insights about the potential outcomes of different policies.

We modify the dynamic CGE model, IMACLIM-SAU (Soummane et al. 2022) to reflect the features of the electricity sector. We then use this model to explore three future power demand scenarios. Our reference scenario contains no additional electricity price reforms and no enforcement of efficiency measures. In our price reform scenario variants, we simulate regulated prices converging to the average prices for emerging G20 countries and all G20 countries. Finally, we run two variants of an energy efficiency scenario in which electricity intensity efficiency improvements are enforced, assuming either moderate or high gains.

In our reference scenario, demand growth is significantly below its historical trend, at 1.6% per year on average between 2019 and 2030. Demand reaches 365.4 TWh by 2030, up from 299.2 TWh in

2018. Our alternative scenarios show the potential for significant savings relative to the reference scenario. Aligning electricity prices with those of emerging G20 countries reduces aggregate demand by 40.5 TWh (11.1%) in 2030. Reaching the average price of all G20 countries abates total electricity demand by 71.6 TWh (19.6%) in the same year. However, opting for efficiency measures to rationalize electricity use may provide even greater savings. In the moderate energy efficiency variant, total electricity demand may be 45.6 TWh (12.5%) lower than in the reference scenario. This difference may reach 118.7 TWh (32.5%) under the ambitious energy efficiency targets of the high energy efficiency variant.

We also analyze the potential macroeconomic effects of our scenarios. In the four alternative variants, real GDP improves overall in 2030 compared with the reference scenario. This outcome stems from the favorable effects of price reforms and efficiency measures on the public budget. Lower electricity demand improves the government's fiscal balance because it alleviates the financial burden associated with power generation subsidies. The impacts on the public budget and debt are greater under the price reform scenario than under the energy efficiency scenario. However, the gains in the former scenario are slightly undermined by the decreases in households' real revenue and producer competitiveness due to higher electricity prices.

One important driver of electricity demand that our analyses do not explicitly account for is future large-scale projects. Indeed, although our model captures sectoral interdependencies, it does not incorporate the government's announcements of several large projects being established across Saudi Arabia. These projects include the development of the tourism industry, with expanded Hajj capacity, and several industrial initiatives (e.g.,

6. Conclusions

the National Industrial Development and Logistics Program). These projects may generate significant incremental electricity demand over the coming decade. This study focuses on

projecting structural sectoral electricity demand through 2030. Future research should account for these large projects and extend our projection horizon.

Endnotes

1 Pumped-storage hydropower is a large-volume electricity storage solution. However, we do not consider this option further in this analysis. See Matar and Shabaneh (2020) for details on the potential of pumped-storage hydropower in the Kingdom.

2 This figure (i.e., 299.2 TWh) corresponds to billed final consumption. It does not include in-plant power use or transmission and distribution losses.

3 He also models aggregate electricity demand in other Gulf Cooperation Council (GCC) countries (i.e., Bahrain, Kuwait, Oman, Qatar and the United Arab Emirates).

4 Eltony and Mohammad (1993) model sectoral electricity demand in aggregate across GCC countries.

5 Atalla et al. (2018) compare total and non-oil GDP as proxies for income. The two proxies lead to significantly different estimates of the income elasticity of Saudi demand for gasoline of 0.09 and 0.61, respectively.

6 Le Treut (2017) models households' consumption of energy goods as the sum of exogenous basic needs and price-elastic uses. This distinction lacks a usable assessment in the case of Saudi Arabia.

7 Soummane et al. (2022) treat electricity production and the three other types of energy production as exogenous.

8 Because estimated elasticities of substitution for Saudi production are lacking, we use published estimates for other countries (see Annex A). We analyze the sensitivity of our results to these key parameters and to other socioeconomic variables in Annex B.

9 Industry corresponds to the SAMA (2019) sectors of Other Mining and Quarrying Activities; Manufacturing; and Electricity, Gas and Water. Private services correspond to Construction; Wholesale & Retail Trade, Restaurants and Hotels; Transport, Storage & Communication; Finance, Insurance, Real Estate & Business Services; and Community, Social & Personal Services. The government sector corresponds to Producers of Government Services.

10 The choice of specification does not significantly impact projected demand. For instance, the projected demand in the REF scenario under Specification 1 deviates from the projected demand under Specification 2 by 1.8% in 2030 (365.4 TWh versus 359.0 TWh).

11 The sample of G20 emerging countries consists of Argentina, Brazil, China, India, Indonesia, Mexico, Russia, Saudi Arabia, South Africa and Turkey. The G20 also includes Australia, Canada, France, Germany, Italy, Japan, South Korea, the United Kingdom and the U.S. The electricity prices for the selected countries are derived from the Enerdata (2021) database.

Endnotes

12 Although our price targets are similar to those of Hasanov (2019), he assumes that the targets are reached in 2025.

13 Given the scope of this study, we focus on energy efficiency measures on the demand side. Large energy savings in terms of oil and gas feedstocks can also be achieved by switching to efficient or alternative generation units (Alyousef and Abu-Ebid 2012; Matar et al. 2017).

14 The SEC's consumption rationalization measures are available at <https://www.se.com.sa/en-us/Pages/IndustrialSector.aspx> for industry, <https://www.se.com.sa/en-us/Pages/CommercialSector.aspx> for the commercial sector and <https://www.se.com.sa/en-us/Pages/GovernmentalSector.aspx> for the government sector.

15 We compute electricity intensity as the ratio of value-added from industry (in real U.S. dollars) to the electricity consumption of the sector (in gigawatthours) using data from Enerdata (2021).

16 In addition to the measures cited for the EE-Mod variant, the main measure underpinning these gains is the replacement of air conditioning units.

17 <https://www.se.com.sa/en-us/customers/Pages/SmartMeters.aspx>

18 Between 1999 and 2008, residential electricity demand grew at an average rate of 6.6% per year.

References

- Al-Faris, Abdul Razak. 2002. "The Demand for Electricity in the GCC Countries." *Energy Policy* 30(2):117–24. DOI: [10.1016/s0301-4215\(01\)00064-7](https://doi.org/10.1016/s0301-4215(01)00064-7)
- Al-Hawwas, Abdullah. 2010. "Policy Experiments for the Saudi Economy Using a Computable General Equilibrium Model (CGE): Oil Demand and Tariff Liberalisation Effects on the Saudi Economy." PhD diss., University of Dundee.
- Al-Sahlawi, Mohammed. 1990. "Forecasting the Demand for Electricity in Saudi Arabia." *The Energy Journal* 11(1):119–25. DOI: [10.5547/issn0195-6574-ej-vol11-no1-10](https://doi.org/10.5547/issn0195-6574-ej-vol11-no1-10)
- Al-Thumairi, Imtithal A. 2012. "Fixed Exchange Rate or Flexible Exchange Rate for Saudi Arabia: Optimal Solution of CGE Model." *International Journal of Basic and Applied Sciences* 1(2):67–87. DOI: [10.14419/ijbas.v1i2.29](https://doi.org/10.14419/ijbas.v1i2.29)
- Aldubyan, Mohammad, and Anwar Gasim. 2021. "Energy Price Reform in Saudi Arabia: Modeling the Economic and Environmental Impacts and Understanding the Demand Response." *Energy Policy* 148:111941. DOI: [10.1016/j.enpol.2020.111941](https://doi.org/10.1016/j.enpol.2020.111941)
- Alkhareif, Riyadh. M., William A. Barnett, and Nayef Alsadoun. 2017. "Estimating the Output Gap for Saudi Arabia." *International Journal of Economics and Finance* 9(3):81–90. DOI: [10.5539/ijef.v9n3p81](https://doi.org/10.5539/ijef.v9n3p81)
- Alyousef, Y., and M. Abu-Ebid. 2012. "Energy Efficiency Initiatives for Saudi Arabia on Supply and Demand Sides." In *Energy Efficiency-A Bridge to Low Carbon Economy*, edited by Zoran Morvaj, 297–308. IntechOpen. DOI: [https://10.5772/38660](https://doi.org/10.5772/38660)
- Anouti, Y., S. Elborai, R. Kombargi and H. Hage (2020). Electricity Pricing Reform: A Bitter Pill for GCC Industries, Strategy&. <https://www.strategyand.pwc.com/m1/en/reports/2020/electricity-pricing-reform/electricity-pricing-reform.pdf>
- Arab Petroleum Investments Corporation (APICORP) 2018. "Saudi Energy Price Reform Getting Serious." *APICORP Energy Research* 3(5):1–3.
- Atalla, Tarek N., Anwar A. Gasim and Lester C. Hunt. 2018. "Gasoline Demand, Pricing Policy, and Social Welfare in Saudi Arabia: A Quantitative Analysis." *Energy Policy* 114:123–33. DOI: [10.1016/j.enpol.2017.11.047](https://doi.org/10.1016/j.enpol.2017.11.047)
- Atalla, Tarek N., and Lester C. Hunt. 2016. "Modelling Residential Electricity Demand in the GCC Countries." *Energy Economics* 59:149–58. DOI: [10.1016/j.eneco.2016.07.027](https://doi.org/10.1016/j.eneco.2016.07.027)
- Beckman, Jayson, Thomas Hertel, and Wallace Tyner. 2011. "Validating Energy-oriented CGE Models." *Energy Economics* 33(5):799–806. DOI: [10.1016/j.eneco.2011.01.005](https://doi.org/10.1016/j.eneco.2011.01.005)
- Billmeier, Andreas, and Dalia Hakura. 2008. "Trade Elasticities in the Middle East and Central Asia: What is the Role of Oil?" *International Monetary Fund Working Papers* 2008(216). DOI: [10.5089/9781451870749.001](https://doi.org/10.5089/9781451870749.001)
- Böhringer, Christoph, and Thomas F. Rutherford. 2013. "Transition Towards a Low Carbon Economy: A Computable General Equilibrium Analysis for Poland." *Energy Policy* 55:16–26. DOI: [10.1016/j.enpol.2012.11.056](https://doi.org/10.1016/j.enpol.2012.11.056)

References

- Cai, Yiyong, and Vipin Arora. 2015. "Disaggregating Electricity Generation Technologies in CGE Models: A Revised Technology Bundle Approach with an Application to the U.S. Clean Power Plan." *Applied Energy* 154:543–55. DOI: [10.1016/j.apenergy.2015.05.041](https://doi.org/10.1016/j.apenergy.2015.05.041)
- Chi, Yuanying, Zhengquan Guo, Yuhua Zheng, and Xingping Zhang. 2014. "Scenarios Analysis of the Energies' Consumption and Carbon Emissions in China Based on a Dynamic CGE Model." *Sustainability* 6(2):487–512. DOI: [10.3390/su6020487](https://doi.org/10.3390/su6020487)
- De Santis, Roberto A. 2003. "Crude Oil Price Fluctuations and Saudi Arabia's Behaviour." *Energy Economics* 25(2):155–73. DOI: [10.1016/s0140-9883\(02\)00106-8](https://doi.org/10.1016/s0140-9883(02)00106-8)
- Devarajan, Shantayanan, and Sherman Robinson. 2002. "The Impact of Computable General Equilibrium Models on Policy." Presented at a conference on "Frontiers in Applied General Equilibrium Modeling" sponsored by the Cowles Foundation and held at Yale University, New Haven, CT, April.
- Diabi, Ali. 1998. "The Demand for Electric Energy in Saudi Arabia: An Empirical Investigation." *OPEC Review* 22(1):13–29. DOI: [10.1111/1468-0076.00039](https://doi.org/10.1111/1468-0076.00039)
- Eltony, M. Nagy, and Yousuf H. Mohammad. 1993. "The Structure of Demand for Electricity in the Gulf Cooperation Council Countries." *The Journal of Energy and Development* 18(2):213–21.
- Enerdata. 2020. "Energy & CO₂ Data." <https://www.enerdata.net/expertise/energy-co2-data.html> Accessed on March 10, 2020.
- Energy and Cogeneration Regulatory Authority (ECRA). 2018. *Annual Statistical Booklet for Electricity and Seawater Desalination Industries*. Riyadh: ECRA.
- Faruqui, Ahmad, Ryan Hledik, Greg Wikler, Debyani Ghosh, Joe Priyanonda, and Nilesh Dayal. 2011. "Bringing Demand-side Management to the Kingdom of Saudi Arabia." *The Brattle Group* 2011:40–41.
- Gelan, Ayele. 2018. "Economic and Environmental Impacts of Electricity Subsidy Reform in Kuwait: A General Equilibrium Analysis." *Energy Policy* 112:381–98. DOI: <http://doi.org/10.1016/j.enpol.2017.10.032>
- Hasanov, Fakhri 2019. "Theoretical Framework for Industrial Electricity Consumption Revisited: Empirical Analysis and Projections for Saudi Arabia." *KAPSARC Discussion Paper*. Riyadh: KAPSARC. DOI: [10.30573/ks--2019-dp66](https://doi.org/10.30573/ks--2019-dp66)
- Hasanov, Fakhri, Frederick L. Joutz, Jeyhun Mikayilov, and Muhammad Javid. 2020. "KGEMM: A Macroeconometric Model for Saudi Arabia" *KAPSARC Discussion Paper*. Riyadh: KAPSARC. DOI: [10.30573/ks--2020-dp04](https://doi.org/10.30573/ks--2020-dp04)
- He, Y. X., L. F. Yang, H. Y. He, T. Luo, and Y. J. Wang. 2011. "Electricity Demand Price Elasticity in China Based on Computable General Equilibrium Model Analysis." *Energy* 36(2):1115–23. DOI: [10.1016/j.energy.2010.11.038](https://doi.org/10.1016/j.energy.2010.11.038)
- Holmøy, Erling. 2005. "The Anatomy of Electricity Demand: A CGE Decomposition for Norway." Discussion Papers No. 426, Statistics Norway, Research Department.
- International Energy Agency (IEA). 2019. *World Energy Outlook 2019*. Paris: IEA.

- International Monetary Fund (IMF). 2016. *World Economic Outlook Database*, April 2016. Washington, D.C.: International Monetary Fund.
- Johansen, Leif. 1960. *A Multi-Sectoral Study of Economic Growth*. Amsterdam: North Holland Publishing Co.
- Kat, Bora, Sergey Paltsev, and Mei Yuan. 2018. “Turkish Energy Sector Development and the Paris Agreement Goals: A CGE Model Assessment.” *Energy Policy* 122:84–96. DOI: [10.1016/j.enpol.2018.07.030](https://doi.org/10.1016/j.enpol.2018.07.030)
- Kingdom of Saudi Arabia. 2017. *Fiscal Balance Program Balanced Budget 2020*. Riyadh: Kingdom of Saudi Arabia. <https://vision2030.gov.sa/sites/default/files/attachments/Fiscal%20Balance%20Program%202017.pdf>
- . 2019. *Fiscal Balance Program 2019 Update*. Riyadh: Kingdom of Saudi Arabia. <https://www.mof.gov.sa/en/budget/2019/Documents/Fiscal%20Balance%20Program.pdf>
- Koesler, Simon, and Michael Schymura. 2015. “Substitution Elasticities in a Constant Elasticity of Substitution Framework—Empirical Estimates Using Nonlinear Least Squares.” *Economic Systems Research* 27(1):101–21. DOI: [10.1080/09535314.2014.926266](https://doi.org/10.1080/09535314.2014.926266)
- Krarti, Moncef, Kankana Dubey, and Nicholas Howarth. 2017. “Evaluation of Building Energy Efficiency Investment Options for the Kingdom of Saudi Arabia.” *Energy* 134:595–610. DOI: [10.1016/j.energy.2017.05.084](https://doi.org/10.1016/j.energy.2017.05.084)
- Le Treut, Gaëlle. 2017. “Methodological Proposal for Hybrid Modelling: Consequences for Climate Policy Analysis in an Open Economy (France).” Ph.D. dissertation, École Doctorale Ville, Transports et Territoires (VTT)-ED 528.
- Lin, Boqiang, and Zhujun Jiang. 2011. “Estimates of Energy Subsidies in China and Impact of Energy Subsidy Reform.” *Energy Economics* 33(2):273–83. DOI: [10.1016/j.eneco.2010.07.005](https://doi.org/10.1016/j.eneco.2010.07.005)
- Liu, Wei, and Hong Li. 2011. “Improving Energy Consumption Structure: A Comprehensive Assessment of Fossil Energy Subsidies Reform in China.” *Energy Policy* 39(7):4134–43. DOI: [10.1016/j.enpol.2011.04.013](https://doi.org/10.1016/j.enpol.2011.04.013)
- Matar, Walid, Frederic Murphy, Axel Pierru, Bertrand Rioux, and David Wogan. 2017. “Efficient Industrial Energy Use: The First Step in Transitioning Saudi Arabia's Energy Mix.” *Energy Policy* 105:80–92. DOI: [10.1016/j.enpol.2017.02.029](https://doi.org/10.1016/j.enpol.2017.02.029)
- Matar, Walid, and Rami Shabaneh. 2020. “Viability of Seasonal Natural Gas Storage in the Saudi Energy System.” *Energy Strategy Reviews* 32:100549. DOI: [10.1016/j.esr.2020.100549](https://doi.org/10.1016/j.esr.2020.100549)
- Mikayilov, Jeyhun, Frederick L. Joutz, and Fakhri Hasanov. 2019. “Gasoline Demand in Saudi Arabia: Are the Price and Income Elasticities Constant.” *KAPSARC Discussion Paper*. Riyadh: KAPSARC. DOI: [10.30573/ks--2019-dp81](https://doi.org/10.30573/ks--2019-dp81)
- Mikayilov, Jeyhun I., Abdulelah Darandary, Ryan Alyamani, Fakhri J. Hasanov, and Hatem Alatawi. 2020. “Regional Heterogeneous Drivers of Electricity Demand in Saudi Arabia: Modeling Regional Residential Electricity Demand.” *Energy Policy* 146:111796. DOI: [10.1016/j.enpol.2020.111796](https://doi.org/10.1016/j.enpol.2020.111796)

References

Nachet, Said, and Marie-Claire Aoun. 2015. "The Saudi Electricity Sector: Pressing Issues and Challenges." IFRI Security Studies Center.

Saudi Arabian Monetary Authority (SAMA). 2019. *Annual Statistics 2019*. Riyadh: SAMA. <http://www.sama.gov.sa/en-US/EconomicReports/Pages/YearlyStatistics.aspx>

Saudi Energy Efficiency Center (SEEC). 2018. SEEC Annual Report. Riyadh: SEEC. <https://www.seec.gov.sa/en/media-center/annual-report/annual-report-for-2018/>

Shehabi, Manal. 2020. "Diversification Effects of Energy Subsidy Reform in Oil Exporters: Illustrations from Kuwait." *Energy Policy* 138:110966. DOI: [10.1016/j.enpol.2019.110966](https://doi.org/10.1016/j.enpol.2019.110966)

Soummane, Salaheddine. 2021. "Overview of Saudi Electricity Demand (1970–2018)." KS--2021-CO03, KAPSARC. <https://www.kapsarc.org/research/publications/overview-of-saudi-electricity-demand-1970-2018/>

Soummane, S., Frédéric Ghersi and Franck Lecocq (2022). "Structural Transformation Options of the Saudi Economy Under Constraint of Depressed World Oil Prices." *The Energy Journal* 43(3): 181-200. DOI: <http://doi.org/10.5547/01956574.43.3.ssou>

Soummane, Salaheddine, Frédéric Ghersi, and Julian Lefèvre 2019. "Macroeconomic Pathways of the Saudi Economy: The Challenge of Global Mitigation Action Versus The Opportunity of National Energy Reforms." *Energy Policy* 130:263–82. DOI: [10.1016/j.enpol.2019.03.062](https://doi.org/10.1016/j.enpol.2019.03.062)

Soummane, Salaheddine, and Nawaz Peerbocus. 2020. "Impact of the COVID-19 Lockdown on Electricity Demand: Global Insights and Implications for Saudi Arabia - Part I." *KS--2020-II19*. Riyadh: KAPSARC. <https://www.kapsarc.org/research/publications/impact-of-the-covid-19-lockdown-on-electricity-demand-global-insights-and-implications-for-saudi-arabia/>

United Nations Department of Economic and Social Affairs (U.N. DESA). 2015. *World Population Prospects: The 2015 Revision*. New York: United Nations.

Wing, Ian Sue. 2006. "The Synthesis of Bottom-up and Top-down Approaches to Climate Policy Modeling: Electric Power Technologies and the Cost of Limiting US CO₂ Emissions." *Energy Policy* 34(18):3847–69. DOI: [10.1016/j.enpol.2005.08.027](https://doi.org/10.1016/j.enpol.2005.08.027)

Annex A. Model parametrization

In this annex, we present the core socioeconomic drivers common to our three simulated scenarios, REF, PR and EE (Table A.1). In Annex B, we

analyze the sensitivity of our results to variations in these parameters.

Table A.1. Socioeconomic drivers common to all scenarios.

Driver	Unit	2013	2030
Labor endowment	Million full-time equivalents	19.9	27.6
Labor productivity	Index equal to 1 in 2013	1.00	1.10
Default export trend	Index equal to 1 in 2013	1.00	1.76
Gross fixed capital formation	Share of GDP	23.9	26.1
Oil output	Million barrels per day	9.2	12.9
Oil price	U.S. dollars per barrel	115	88

The primary drivers of economic growth are the exogenous labor endowment and productivity trajectories. We measure labor endowment by the population in the 15-65 years age group, derived from the United Nations (UN 2015). For labor productivity, we use annual data reported by Oxford Economics between 2013 and 2017. After 2017, we assume that labor productivity grows at 1.3% per year through 2030. This rate corresponds to the average productivity growth for the Saudi economy between 2011 and 2015 estimated by Alkhareif et al. (2017).

We apply the default export trend to non-energy goods to define the baseline subject to terms-of-trade variations. The growth of Saudi export markets is approximated by that projected by the

International Monetary Fund (IMF 2016) for the Middle East and North Africa region.¹⁹ Investment, that is, gross fixed capital formation, is a constrained share of GDP calibrated based on SAMA (2019) data between 2013 and 2017. It is assumed to converge to its 2013-2017 average in 2030.

The oil sector plays an important role in the Saudi economy. The two key variables driving its performance, that is, output and price, are both exogenous in IMACLIM-SAU. Their trajectories are based on the International Energy Agency's (IEA's) Stated Policies Scenario Saudi oil output reaches 12.9 million barrels per day in 2030 (IEA 2019). The international oil price is projected to recover from its low 2015 level to \$81 per barrel in 2025 and \$88 per barrel in 2030 (IEA 2019).

¹⁹ See Equation A-30 of Soummane et al. (2022).

Annex A. Model parametrization

The production functions described in section 3.1 build on the elasticities of substitution and trade elasticities presented in Table A.2. More detailed

algebraic descriptions are provided in Annex A of Soummane et al. (2022).

Table A.2. Substitution and trade elasticities.

	σ_{VA}	σ_X	σ_M
OIL	1.28	-	-
GAS	1.28	-	-
REF	0.31	-	-
ELE	0.30	-	-
AGR	0.34	0.67	-0.09
MIN	1.28	0.67	-0.09
CHM	0.52	0.67	-0.09
NMM	0.29	0.67	-0.09
MAN	0.25	0.67	-0.09
PRV	0.27	0.67	-0.09
PUB	0.43	0.67	-0.09
TRA	0.87	0.67	-0.09
OTP	0.56	0.67	-0.09

Sources: Koesler and Schymura (2015), Billmeier and Hakura (2008).

At the bottom of the production function, capital, labor and electricity are treated as substitutable inputs to the production of value-added (VA). Moreover, non-energy goods are elastic to the terms

of trade, with elasticities of σ_X for exports and σ_M for imports. More details are provided in Annex A of Soummane et al. (2022).

Annex B. Sensitivity analysis

In this section, we present a sensitivity analysis of electricity demand to the socioeconomic variables listed in Annex A. For brevity, we present the sensitivity results for aggregate demand in the REF scenario and the variation in GDP at the end of the projection horizon. The main goal of this

analysis is to show how variations in the selected model drivers may impact electricity demand in 2030. The macroeconomic and social drivers in the model are subject to uncertainties. Thus, we test them within reasonable boundaries corresponding to “low” and “high” variants (Table B.1).

Table B.1. Exogenous socioeconomic variables in the model in 2030.

Variable	Unit	Low	REF	High
Active population	Million full-time equivalents	26.2	27.6	29.0
Labor productivity	Index equal to 1 in 2013	1.05	1.10	1.27
Default export trend	Index equal to 1 in 2013	1.41	1.76	2.12
Gross fixed capital formation	Share of GDP	23.9	26.1	29.8
Elasticity of substitution, σ_{VA}	n.a.	0.5* Reference value	Reference value	1.5* Reference value
Oil output	Million barrels per day	11.0	12.9	13.5
Oil price	U.S. dollars per barrel	62	88	111

We vary the active population endowment by $\pm 5\%$ of the REF scenario target in 2030. For labor productivity, we assume a moderate gain of 5% by 2030 in the low variant, corresponding to the targeted increase from Oxford Economics. We assume a gain of 27% in the high variant, corresponding to the non-oil productivity gains estimated by Alkhareif et al. (2017). We vary the default export trend by $\pm 20\%$ of the REF scenario target in 2030. We interpret the low export variant as weaker growth in the Middle East and North Africa as the region fails to recover economically from the COVID-19 pandemic. The high variant reflects a quick post-pandemic recovery of the region’s economies.

No proper estimates of elasticities of substitution (σ_{VA}) in the Saudi context are available. Thus, we also conduct sensitivity analyses for the parameters presented in Table A.2. To do so, we multiply these elasticities by factors of 0.5 (low variant) and 1.5 (high variant), respectively. For gross fixed capital formation, investment returns to its 2013 level in the low variant. In the high variant, investment reaches its 2015 level. In 2015, the government stimulated the non-oil sector with public spending in reaction to an oil price slump. We use the percentage variations in oil production in the Middle East region projected by the IEA (2019). Production in the low and high variants corresponds to the IEA’s Sustainable Development Scenario (SDS) and Current Policies Scenario (CPS), respectively.²⁰ Likewise, the low

²⁰ The IEA (2019) does not project Saudi Arabia’s oil production in its alternative CPS and SDS scenarios.


Annex B. Sensitivity analysis

and high variants for projected oil prices correspond to oil prices in the IEA (2019) SDS and CPS.

The analysis reveals that electricity demand is more sensitive to variations in investment, oil prices and productivity levels. It is moderately sensitive to variations in the active population (Figure B.1). Oil production levels and the default export trend for non-energy goods only marginally impact electricity demand. The variants used for the presented sensitivity analysis are based on the REF scenario. In other words, they have fixed electricity prices

at 2018 levels and fixed electricity intensities of production at the 2013-2018 average. The exception is the sensitivity analysis for σ_{VA} , which is based on production Specification 1. Thus, the variations in electricity demand stem from impacts on households' revenue dynamics, sectoral outputs and the fiscal balance. These variables, along with other macroeconomic variables (e.g., the unemployment rate, trade balance and public debt) drive the changes in electricity demand trajectories. Together, these variations result in changes in GDP.

Figure B.1. Sensitivity of total electricity demand to macroeconomic variables, difference from the REF scenario in 2030.

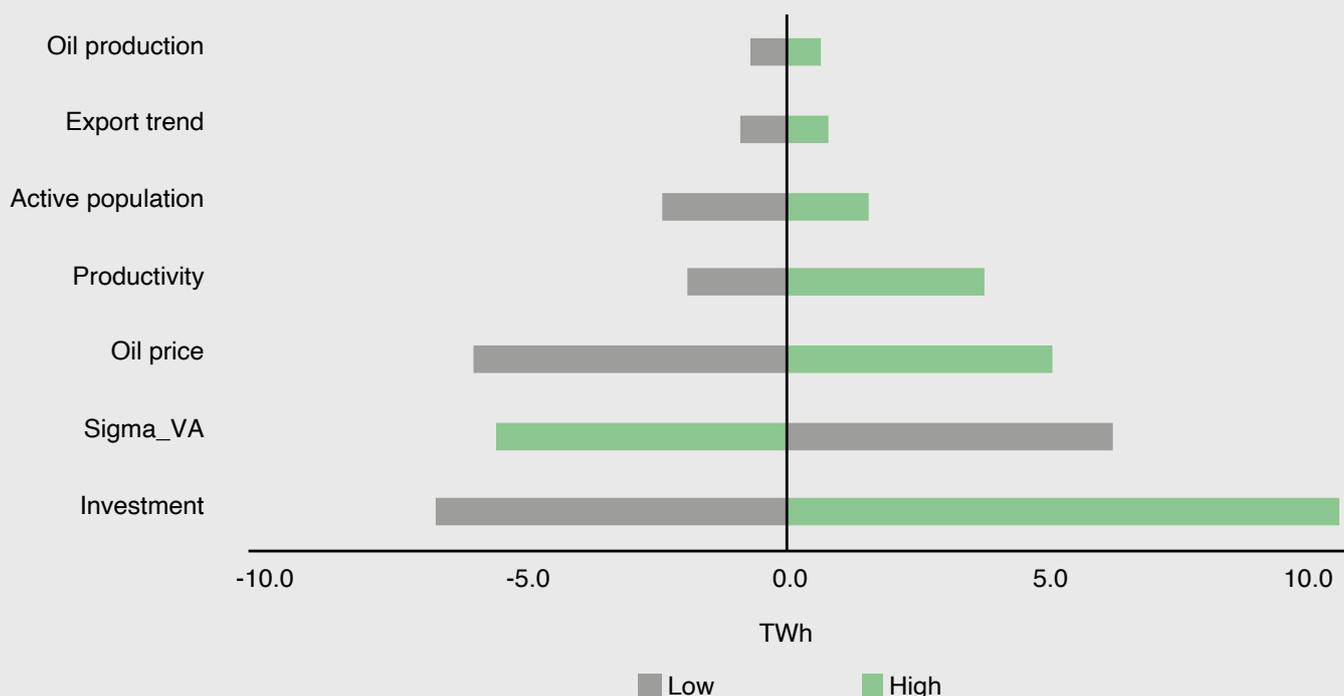

Source: IMACLIM-SAU simulations.

As stated previously, we restrict the sensitivity analysis for macroeconomic variables to induced variations in real GDP relative to its 2030 level in the REF scenario. As expected, higher variation in real GDP is associated with higher variation in

total electricity demand, with the exception of oil production. GDP in 2030 varies by -2.1% and +3.4% relative to the REF scenario in the low and high investment variants, respectively. Oil prices in the low and high variants are associated with GDP

changes of -2.3% and +1.8%, respectively. In the low variants for the active population, productivity and the default export trend, GDP changes by -0.8%, -0.6% and -0.3%, respectively. In the high variants for those factors, it changes by +0.5%, +1.3% and +0.3%, respectively, compared to the REF scenario.

Finally, reducing the elasticity of substitution of the inputs to electrified value added is associated with higher electricity consumption but reduces GDP by 0.5%. Increasing this elasticity of substitution improves GDP by 0.2%. Indeed, lowering the

substitutability of primary production factors increases the share of electricity, as it becomes a rigid production factor with fewer substitutes. However, because electricity has a lower share of value added, increasing its share compared with the other factors slightly reduces GDP. Conversely, increasing substitutability at the bottom of the production function allows competing factors (i.e., labor and capital) to substitute for electricity in the production process. However, this substitutability warrants additional bottom-up expertise, as further electrifying some industrial processes requires retrofits or upgrades to production mechanisms.

About the Authors



Salaheddine Soummame

Salaheddine is a research associate in the Energy Transitions and Electric Power program. His current research focus includes modeling the Saudi electricity market, including its reforms and regulatory framework.

Prior to joining KAPSARC, Salaheddine worked as a research associate for the Centre for International Research on Environment and Development (CIRED), a National Center for Scientific Research (CNRS) lab, based in Paris, where he focused on integrated economy-energy modeling. He has also worked as an economist researcher within the research and development (R&D) department of the utility group EDF (Paris). He was part of the group's energy markets and environmental regulation unit focused on emerging markets.

Salaheddine holds a Ph.D. in Economics from Paris-Saclay University (France), an M.Sc. in Energy Economics from the University of Montpellier (France), and an M.Sc. in Finance from the Aix-Marseille School of Economics (France).



Frédéric Gherzi

Frédéric Gherzi is a French CNRS researcher assigned to the Centre International de Recherche sur l'environnement et le Développement (CIRED), Paris. Since 1997, he has been working on hybrid bottom-up and top-down modeling of economy-energy-environment (3E) interactions, which he applies to develop outlooks on the efficiency and equity of climate policies and energy transitions.

His current research focuses on the macroeconomics of climate finance, on the distributional impacts of the French National Low Carbon Strategy (SNBC), and on the transfer of the IMACLIM method (model and data hybridization) to international academic partners in the framework of the IMACLIM Network. The network now extends to 11 countries, including France and the BRICS states (Brazil, Russia, India, China, and South Africa).

About the Project

The electricity sector is at the heart of energy transition in many countries. Both the demand and the supply side of the electricity market require rigorous assessments to identify the appropriate policy options that can yield the maximum benefit for stakeholders. This project focuses on the demand side of the Saudi market. The supply side, including the evolution of the power mix and the integration of the domestic electricity market with regional markets, is assessed in other projects.

Electricity demand in Saudi Arabia has grown consistently over the past decades. Since 2016, Saudi Arabia has initiated price reforms and launched rationalization campaigns for energy use, to curb electricity demand and inefficient use. As a result, Saudi electricity demand flattened between 2016 and 2018, eventually dropping for the first time on record in 2019. The various factors determining potential demand growth or decline and the impact of energy efficiency on electricity demand growth in developing economies are not well understood.

Understanding electricity demand growth is critical for public policy development. Uncertainty regarding electricity demand growth rates directly impacts investment needs. This project disentangles the primary driving factors of Saudi electricity demand. We analyze potential future trends of electricity demand by sector in Saudi Arabia.



مركز الملك عبدالله للدراسات والبحوث البترولية
King Abdullah Petroleum Studies and Research Center

www.kapsarc.org